

Task III.B: Weather Information

Table of Contents

Lesson Overview	1
Instructor Notes	2
Lesson Details	3
METAR	3
TAF	4
Surface analysis charts	5
Radar summary chart	6
Winds and temper aloft chart (FD)	7
Significant weather prognostic charts	8
Low level chart	8
ASOS (Automated Surface Observing System)	11
AWOS (Automated Weather Observing System)	11
ATIS (Automated Terminal Information Service)	12
Go/No-go decision	12
External Rersources	13
Conclusion	13
ACS Requirements	13

Lesson Overview

Objective

The student should develop knowledge of the elements related to weather information with the ability to interpret several weather sources and make a competent, well educated, Go/No Go decision. The student should also develop knowledge of the elements related to weather information, by analyzing weather reports, charts, and forecasts from various sources.

Reference

- [AC 00-45H, Aviation weather services](#)
- Foreflight weather briefings

Key Elements

- Information sources
- EFAS—122.0
- Go/No Go decision

Elements

- METAR

- TAF
- Surface analysis chart
- Radar summary chart
- Winds and temperature aloft
- Significant weather prognostic charts
- Convective outlook chart
- AWOS, ASOS, ATIS reports
- Weather briefing
- Weather information sources
- In-flight weather advisories
- Go/No-go decision

Equipment

- White board
- Markers
- References

Schedule

1. Discuss objectives
2. Review material
3. Development
4. Conclusion

Instructor Actions

1. Discuss lesson objectives
2. Present lecture
3. Questions
4. Homework

Student Actions

- Participate in discussion Take notes

Completion Standards

The student can effectively interpret the necessary weather information, and has the ability to make a competent Go/No Go decision, based on the information.

Instructor Notes

Attention

Instead of getting ourselves stuck, in the air, in a thunderstorm or some sort of extreme weather we should have a good understanding of weather information in order to know when to and not to fly.

Overview

Review Objectives and Elements/Key ideas

What

Through a complex system of weather services, government agencies, and independent weather observers, pilots are given vast information regarding weather patterns, trends, and characteristics in the form of up-to-date weather reports and forecasts.

Why

These reports and forecasts enable pilots to make informed decisions regarding weather and flight safety.

Lesson Details

Weather, good or bad, impacts each and every flight. Having a solid understanding of weather, and how to obtain current/forecast weather information, is critical to every flight.

METAR

Aviation routine weather report—observation of current surface weather reported in a standard international format.

Although there is not enough time in this lesson to cover all aspects of Metar Encoding, here is a simple guide to helping understand how METARS work.

METAR Codes

□□

- Type of report—there are two types, routine and special. Routine METAR is transmitted hourly. Special weather reports (SPECI) are given any time to update a METAR for rapidly changing weather, aircraft mishaps, etc.
- Station identifier—four-letter code (e.g. KLAF). Alaska begins with PA, Hawaii begins with PH.
- Date and time of report—reported in a six-digit group, first two digits are the date, last four are the time, in UTC.
- Modifier—denotes that the METAR came from an automated source or was corrected.
 - AUTO—indicates the report came from an automated source.
 - A01 and A02—indicate the type of precipitation sensors at the station.
 - COR—indicates a corrected report.
- Wind—reported with five digits, unless the wind speed is more than 99 knots, in which case it becomes six digits.
 - First three digits indicate wind direction in tens of degrees. Last two digits indicate the speed of the wind in knots. Gusting shown with the peak gust after the “G”.

- If wind varies more than 60 degrees and the speed more than 6 knots, a separate group of numbers, separated by a “V” will indicate the extremes of the directions.
- Visibility — reported in statute miles.
 - RVR is sometimes reported following visibility—the distance a pilot can see down the runway in a moving aircraft. “R”, then runway number, a slant, and the visual range in feet.
- Weather — includes weather phenomenon and qualifiers.
 - Phenomena describe precipitation, obscuration, etc. DZ, RA, HZ, SS, DS, SN, etc. Qualifiers show the intensity or proximity. -, +, VC, SH, TS, FZ, etc.
- Sky condition - reported in the sequence of amount, height, and type. Height depicted with three digits, in hundreds of feet AGL. Clouds above 12,000 ft are not detected. Towering cumulus and cumulonimbus clouds are reported with their height.
 - The amount of sky coverage is reported in eighths of the sky from horizon to horizon.
 - SKC/CLR/FEW, FEW, SCT, BKN, OVC
- Temperature and dewpoint—in degrees Celsius. Temperatures below 0°C preceded by the letter “M.”
- Altimeter setting — preceded by the letter “A” and reported in inches of mercury in a four digit number. “PRESRR” or “PRESFR” represent rising or falling pressure.
- Remarks — may include wind data, variable visibility, begin/end times of phenomenon, pressure info, and other necessary info.

TAF

Terminal aerodrome forecast—report established for the 5SM radius around an airport. Valid for a 24-hr period, and updated four times a day (0000Z, 0600Z, 1200Z, 1800Z).

Utilizes the same descriptors and abbreviations as the METAR.

TAF Codes

□□

- Type of report—can be a routine forecast (RAF) or an amended forecast (TAF AMD).
- ICAO station identifiers—same as METAR.
- Date and time of origin—six number code, same as METAR.
- Valid period date and time—given by a 6-digit group: the first two are the date, the next two are the beginning time for the valid period; the last two are the end time.
- Forecast wind—the wind direction and speed forecast, given in a 5- digit group.
- Forecast visibility—given in statute miles; if greater than 6SM shown as P6SM.
- Forecast change group—includes the expected conditions and time period for any

significant weather change forecast to occur.


- **FM**—from used when a rapid and significant change is expected within an hour
- **BECMG**—becoming used when a gradual change is expected over no more than two hours
- **TEMPO**—temporary used for temporary fluctuations, expected to last less than an hour.
- Probability forecast—percentage describing the probability of thunderstorms and precipitation occurring in the coming hours.

Surface analysis charts

Depicts an analysis of current surface weather. Transmitted every 3 hours, covers contiguous 48 states and adjacent areas. Shows areas of low/high pressure, fronts, temperatures, dewpoints, wind direction and speed, local weather, and visual obstructions.

Also depicts surface weather observations for reporting points across the US, each illustrated by a station model that includes:

- Type of observation—round is official weather observer, square is automated station.
- Sky cover—shown as clear, broken, overcast, or obscured/partially obscured.
- Clouds—cloud types represented by specific symbols. Low cloud symbols placed beneath station model; middle and high cloud symbols placed directly above station model. Typically only one type of cloud depicted.
- Sea level pressure—given in 3 digits to the nearest tenth of a millibar. For 1000 mbs or greater, prefix a 10 to the 3 digits; for less than 1000 mbs, prefix a 9 to the 3 digits.
- Pressure change/tendency—in tenths of mbs over the past 3 hours, depicted directly below the sea level pressure.
- Precipitation—precipitation that has fallen over the last 6 hours to the nearest hundredth of an inch.
- Dewpoint—in degrees Fahrenheit.
- Present weather—many different weather symbols used to describe the current weather.
- Temperature—in degrees Fahrenheit.
- Wind—true direction of wind, given by the wind pointer line, indicating the direction from the wind is coming. Short bar=5 knots, long bar=10 knots, pennant=50 knots.

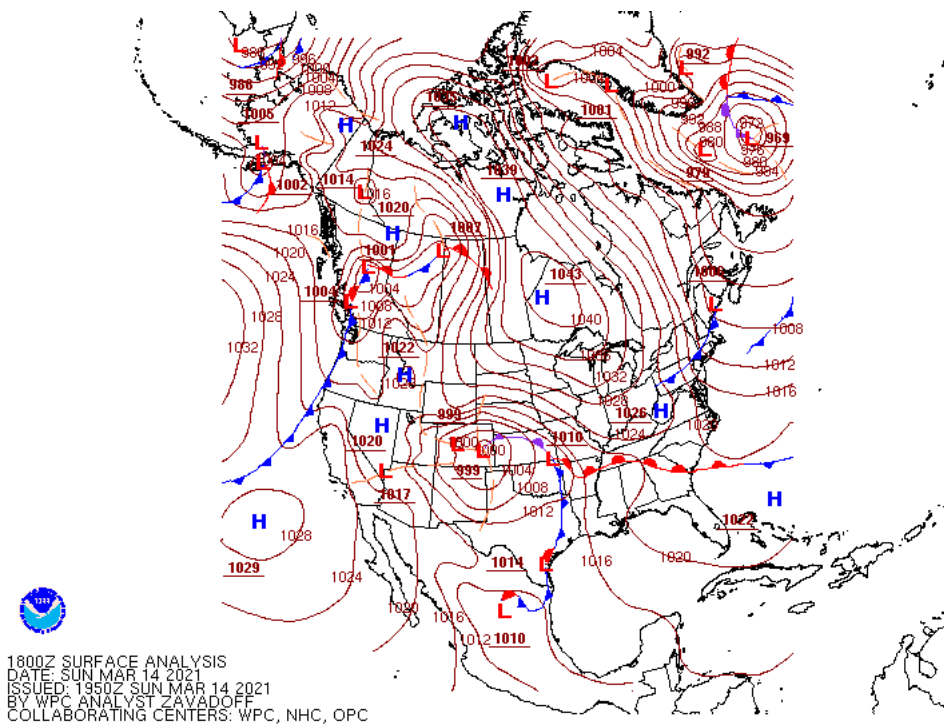


Radar summary chart

Graphically depicted collection of radar weather reports. Display areas of precipitation and information regarding the characteristics of precipitation. Published hourly, at 35 minutes past the hour.

- No information—if information is not reported, it will say “NA.” If no echoes are detected, it will say “NE.”
- Precipitation intensity contours—described as one of six levels, shown by three contour intervals.
- Height of tops—heights of echo tops given in hundreds of feet MSL.
- Movement of cells—indicated by an arrow pointing in the direction of movement, speed in knots at the top of the arrow. “LM” indicates little movement.
- Type of precipitation—marked using specific symbols (not those used on METAR).
- Echo configuration—echoes shown as being areas, cells, or lines.
- Weather watches—depicted by boxes outlined with heavy dashed lines.

Only depicts areas of precipitation — will not show areas of clouds and fog with no appreciable precipitation. Will not show the heights of tops and bases of clouds.

Depiction of current precipitation, should be considered with current METAR and weather forecasts.

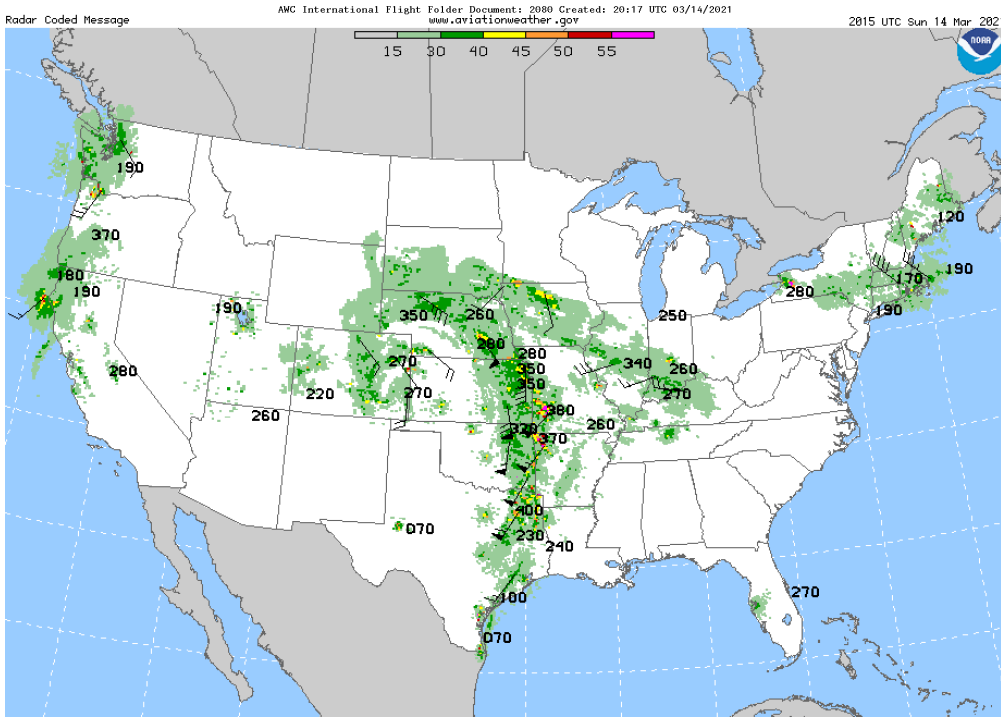

Winds and temper aloft chart (FD)

Provides wind and temperature forecasts for specific locations. Forecasts made twice a day, 0000Z and 1200Z. Uses true altitudes through 18,000 ft and pressure altitudes above 18,000 ft.

NOAA NATIONAL WEATHER SERVICE AVIATION WEATHER CENTER

Local Forecast Go **HOME ADVISORIES FORECASTS OBSERVATIONS TOOLS NEWS SEARCH ABOUT USER**

Winds/Temps Data [W/T Home](#) [W/T Plots](#) [W/T Data](#) [W/T Info](#)

Level: Low High **202-03Z** Southeast (Miami)

(Extracted from FBUS31 KWN0 141955)

FD1US1
DATA BASED ON 141800Z
VALID 150000Z FOR USE 2000-0300Z. TEMPS NEG ABV 24000

FT	3000	6000	9000	12000	18000	24000	30000	34000	39000
EYN	1112	1408+18	1106+12	0708+05	3415-07	3212-20	281036	281446	272558
JAX	2707	2910+10	2722+10	2727+04	2940-11	2952-22	295238	295948	286060
MIA	9900	9900+18	3105+12	9900+05	3218-08	3121-20	302436	302947	283658
MLB	2705	3010+15	2818+11	2716+04	3029-09	3035-21	314137	294248	284759
PFN	2207	2214+14	2322+11	2423+05	2634-10	2744-22	274938	274848	265360
PIE	1105	2205+16	2516+12	2515+04	2926-09	2834-21	303637	293447	274059
TLH	2206	2510+13	2520+10	2522+04	2736-10	2846-22	285038	285248	275760
ATL	9900	9900+10	2518+07	2630+02	2846-12	2856-24	286839	287449	288462
CSG	1807	1807+11	2419+09	2527+03	2743-11	2754-23	276139	276549	277261
SAV	2908	2912+10	3128+07	2934+03	2951-12	2961-23	296739	297348	297961
HAT	3030	3040+06	3141+01	3244-04	3062-16	2974-27	790142	802451	802761
ILM	3213	3328+07	3229+03	3136-03	2967-15	3075-26	298441	790451	791363
RDU	3125	3132+07	3232+02	3334-05	3059-16	3065-27	299142	791552	792663
CAE	3106	3018+09	3018+03	2938+00	2956-13	2968-25	298339	298950	299562
CHS	3110	3025+10	3223+04	3043+02	2954-13	2966-24	307639	298349	298861
FLO	3413	3319+08	3119+04	3030-02	2963-14	3075-25	298840	299951	790462
GSP	0211	3409+08	2915+03	2833-01	2957-13	2968-25	298539	299051	299863
2XG	3108	3012+11	3131+09	2935+04	2942-12	3057-22	306339	307048	307360

Page loaded: 20:49 UTC | 01:49 PM Pacific | 02:49 PM Mountain | 03:49 PM Central | 04:49 PM Eastern

ADVISORIES

- SIGMET
- G-AIRMET
- Center Weather

FORECASTS

- Conviction
- Turbulence

FORECASTS

- Icing
- Winds/Temps
- Prog Charts
- TAFs
- Aviation Forecasts
- WAFS Forecasts
- Area Forecasts
- Avn Forecast Disc (AFD)

OBSERVATIONS

- Aircraft Repts
- METARs
- Radar
- Satellite

USER TOOLS

- Flightpath Tool
- HEMS Tool
- Text Data Server
- Flight Folder
- Decision Support
- PIREP Submit
- Standard Briefing
- Aviation Testbed
- Aviation Links

ABOUT US

- AWC
- Help
- FAQ
- Contact Us

Wind direction is always in reference to true north—wind speed always given in knots. No winds are forecast when a given level is within 1,500 ft of station elevation.

Wind direction and wind speed listed together in four-digit code:

- First two digits indicate direction the wind is blowing from in tens of degrees.
- Second two digits indicate the speed of the wind.

If windspeed is forecast to be greater than 100 knots but less than 199 knots, 50 is added to direction, and 100 is subtracted from the speed. Do the reverse to decode. If windspeed is forecast to be 200 knots or greater, the wind group is coded as 99 knots. Light and variable wind is coded as “9900.”

Temperature is always given in degrees Celsius. No temperatures are forecast for a level within 2,500 ft of station elevation. Temperatures above 24,000 ft MSL are always negative.

Significant weather prognostic charts

Portray forecasts of selected weather conditions at specified valid times. Forecasts made from a comprehensive set of observed weather conditions that are extended forward in time and become forecasts by considering atmospheric and environmental processes.

Forecast made for various periods of time—each valid time is the time at which the forecast conditions are expected to occur, and is printed on the lower left corner of each panel. Issued four times a day, at 0000Z, 0600Z, 1200Z, and 1800Z. 12-hour prog—forecast of conditions with a valid time 12 hours after the observed time.


Altitude information referenced to MSL. True altitude below 18,000’, pressure altitude above 18,000’.

Prog charts generated for two general time periods. Day 1 progs are forecast for the first 24-hour period and are prepared for 2 altitude references. Day 2 progs are forecast for the second 24-hour period. Charts available for low-level significant weather and high-level significant weather.

Low level chart

Day 1 forecast of significant weather for the conterminous US. Weather information for layer from surface to FL240 (400 mbs). Information provided for two forecast periods: 12 hours and 24 hours. Provides overview of selected flying weather conditions up to 24,000 ft. We can use surface pressure patterns to infer surface winds. We can infer structural icing in areas with clouds and precipitation above freezing levels, and in areas of freezing precipitation.

Four panels:

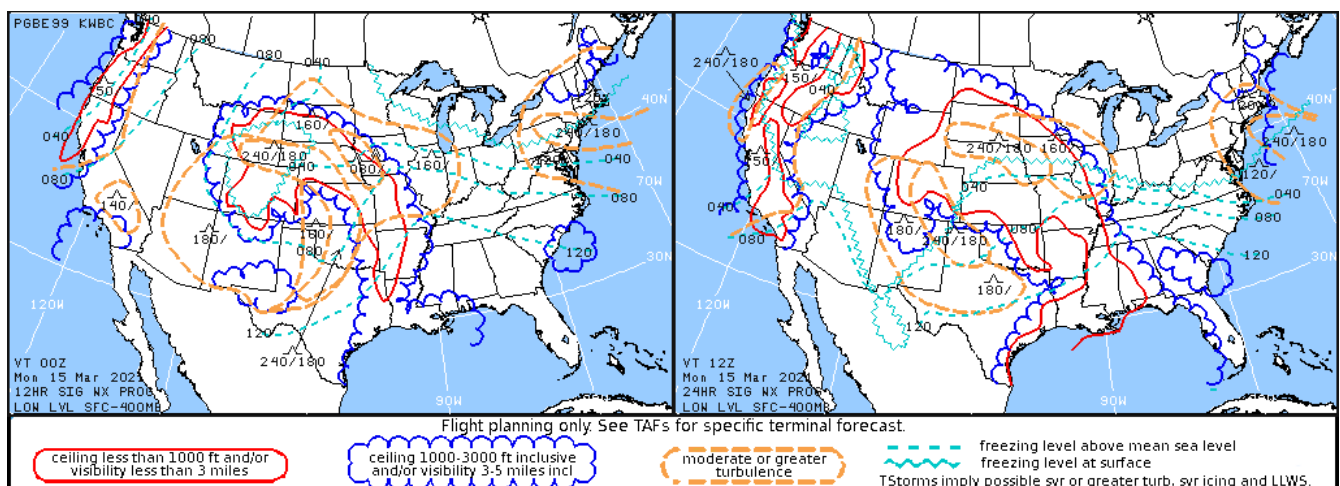

- Upper two panels depict 12- and 24-hr significant weather progs Display forecast weather flying categories (VFR, IFR, MVFR), freezing levels, and turbulence
- Lower two panels depict 12- and 24-hr surface progs

Display forecast positions and characteristics of pressure systems, fronts, precipitation. Arrow indicates direction of movement of pressure center; speed in knots. Outline for areas of forecast precipitation and thunderstorms—shaded areas of precipitation indicate at least ½ the area is affected by the precipitation, and unique symbols indicate the type of precipitation.

36- and 48-hr surface prog

Day 2 forecast of general weather—extension of day 1 low-level prog chart, issued from same observed data base. Issued two times daily (0000Z and 1200Z), charts valid 36/48hrs after observation.


Two panels (36- and 48-hr surface progs) and a forecast discussion. The panels display forecast positions/characteristics of pressure patterns, fronts, and precipitation. Forecast discussion is a discussion of day 1 and day 2 forecast package—identifies weather systems and associated weather conditions portrayed on prog charts.

Use for general weather conditions outlook and to assess the progression of weather through Day 2.

High-level significant weather prog

Day 1 forecast of significant weather covering a large portion of the Northern Hemisphere and a limited portion of the Southern Hemisphere for 24,000 to 60,000 ft. Conditions routinely appearing above the jet streams with cumulonimbus clouds, turbulence, tropopause heights, surface front information.


Tropical cyclones, squall lines, eruptions, sandstorms, dust storms. Issued 4 times a day, valid time 00Z, 06Z, 12Z, 18Z.

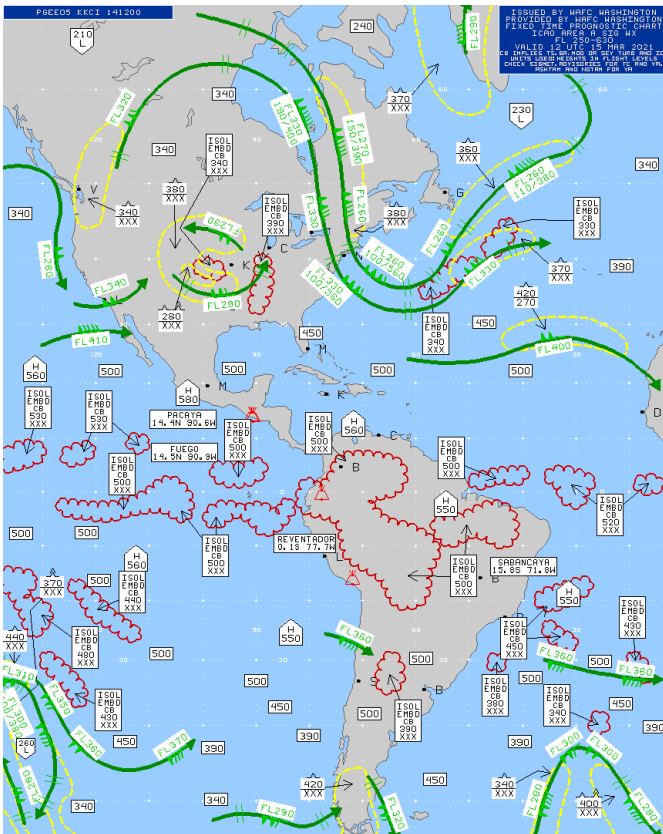

Convective Outlook Chart

Flight planning tool used to determine forecast areas of thunderstorms. Outlines general thunderstorms and provides risk areas. Two panels—Day 1 (left) and Day 2 (right) convective outlook. □ Day 1 issued 5 times daily (first issuance at 0600Z, then 1300Z, 1630Z, 2000Z, and 0100Z) all valid until 12Z the next day.

- Day 2 issued 2 times daily (first issuance at 0830Z during standard time, 0730Z during daylight time, updated at 1730Z), valid from 12Z the following day to 12Z the next day. Risk levels depend on number of severe thunderstorm reports per geographical unit and forecaster confidence
- SEE TEXT used for situations where slight risk is considered but not warranted at the time of forecast
- SLGT describes a high probability of 5-29 reports of >1" hail and/or 3-5 tornadoes, and/or 5-29 wind events. Well-organized severe thunderstorms expected but in small numbers and low coverage.
- MDT describes a high probability of at least 30 reports of >1" hail, 6-19 tornadoes, or numerous wind events. Greater concentration of severe thunderstorms and greater wind magnitude.
- HIGH describes a high probability of at least 20 tornadoes (at least two of them rated F3 or higher) or an extreme derecho causing widespread (> 50) wind events with higher-end winds (> 80 mph) and structure damage reports. A major weather outbreak is expected with great coverage.

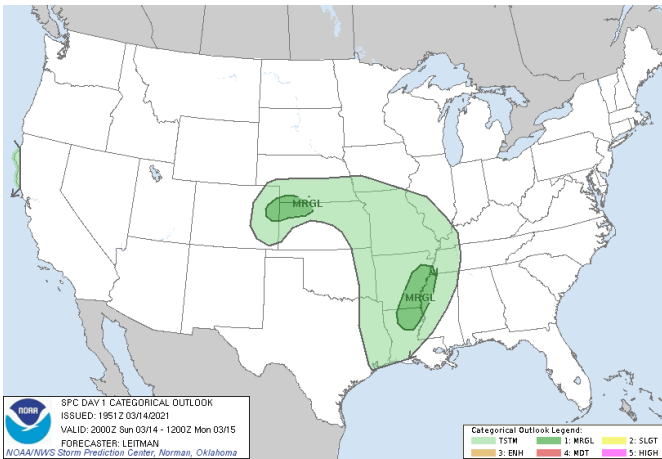

ASOS (Automated Surface Observing System)

Continuous minute by minute observations that are used to generate a METAR and provide information. Transmits SPECI report whenever it detects a significant change in conditions.

Contains

- Cloud height indicator
- Visibility sensor
- Precipitation identification sensor
- Freezing rain sensor (at select sites)
 - Designated A01 without liquid/frozen precipitation discriminator, A02 with
- Pressure sensors
- Ambient temperature and dew point temperature sensors
- Anemometer for wind direction and speed
- Rainfall accumulation sensor
- Lightning detection equipment installed at selected sites

Cannot distinguish between stratus/cumulonimbus clouds. Limited ability to identify visibility restrictions (prevailing, sector, tower visibility) without input from human observer.

- **Level A:** highest level of service, available at major airports
- **Level B:** has human observers available 24hrs
- **Level C:** at airports with part-time towers (human augmentation ends when tower closes)
- **Level D:** at smaller, non-towered airports (unattended, always AUTO when in METAR)

AWOS (Automated Weather Observing System)

First widely installed automated weather data gathering system at airports. Available in lesser configurations.

- **AWOS-A:** Only reports altimeter setting

- **AWOS-1:** Measures and reports wind speed, direction, gusts, temperature, and dew point
- **AWOS-2:** Visibility information
- **AWOS-3:** Cloud/ceiling data (essentially equivalent to ASOS); may include precipitation discriminators and lightning detection.

Difference between ASOS and AWOS—the ability to detect and report significant changes in surface weather. AWOS transmits three reports per hour at fixed intervals and cannot issue a special report as needed.

ATIS (Automated Terminal Information Service)

Continuous broadcast of recorded non-control information in busier terminal areas. Contains essential information such as weather and active runways and approaches. It is given a letter designation and is updated when there is a significant change.

Re-recorded at every update. Data may be entered by hand, from a METAR, or directly from the sensors. Modern systems are fully automated.

Arriving/departing aircraft ATIS may be on separate frequencies.

Go/No-go decision

The go/no go decision includes a number of possible factors, with one significant component being the weather. The decision must be made as to whether the pilot can handle the aircraft and conditions expected to be encountered during the flight. Certain conditions may warrant an automatic no-go decision. These might include the following.

1. Thunderstorms of any kind, especially embedded
2. Fast-moving fronts or squall lines
3. Moderate or greater turbulence
4. Icing
5. Fog, or other visual obscuration
6. In addition to weather other factors can drive a go/no-go decision. The physical and mental condition of the pilot is important. If the pilot is sick, depressed, upset, or tired those conditions may affect the pilot's ability to handle the demands of the flight. Use the IMSAFE checklist to help evaluate.

Evaluate the pilot's recent flight experience, as well. Don't go beyond the pilot's or the aircraft's current capabilities. For instance, is the pilot comfortable dealing with MVFR conditions if they haven't flown in some time?

Flying is a continual decision making process throughout any flight. Weather and other circumstances evolve with time, so divert or discontinue a flight enroute if conditions warrant.

External Resources

- [ForeFlight Weather Briefing Howto](#)

Conclusion

It is very important to be able to interpret and make a Go/No Go decision based on the information attained. A safe flight begins with a thorough weather briefing to ensure the pilot understands the meteorological factors that may affect the flight.

ACS Requirements

To determine that the applicant exhibits instructional knowledge of the elements related to weather information by describing:

1. Importance of a thorough preflight weather briefing.
2. Various means and sources of obtaining weather information.
3. Use of real-time weather reports, forecasts, and charts for developing scenario-based training.
4. In-flight weather advisories.
5. Recognition of aviation weather hazards to include wind shear.
6. Factors to be considered in making a “go/no-go” decision.